



### SKU : 131744

This series of hydraulic workshop presses with motor drive is produced in Europe. The stable portal design with adjustable, open support table is suitable for applications such as pressing in and out bearings, for assembly and straightening work or for testing workpieces. The laterally positionable working cylinder facilitates set-up without the workpiece having to be moved. These presses are almost indispensable in technical workshops and maintenance departments.

- High quality – made in Europe
- Hydraulic motor drive
- Horizontally adjustable cylinder unit
- Adjustable table height

## TECHNICAL SPECS

### WORKING AREA

|                           |            |
|---------------------------|------------|
| Pressure force            | 66 t       |
| Operating pressure (max.) | 3755.5 psi |
| Stroke                    | 15 in      |
| Forward motion speed      | 0.34 in/s  |
| Press speed               | 0.08 in/s  |
| Return speed              | 0.42 in/s  |

### DRIVE CAPACITY


|                             |      |
|-----------------------------|------|
| Motor rating hydraulic pump | 2 Hp |
|-----------------------------|------|

### MEASURES AND WEIGHTS


|                       |           |
|-----------------------|-----------|
| Hydraulic tank volume | 10.82 gal |
| Weight                | 1188 lbs  |

### DIMENSIONS


|   |       |
|---|-------|
| A | 83 in |
| B | 39 in |
| C | 27 in |
| D | 30 in |
| E | 10 in |
| F | 52 in |
| G | 6 in  |
| H | 8 in  |
| I | 30 in |
| J | 32 in |
| K | 8 in  |

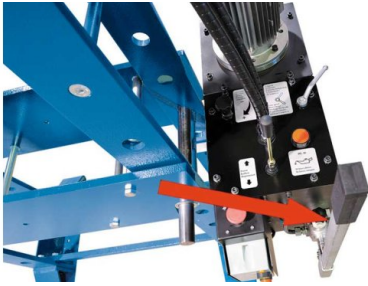

*A hand pump is available for very delicate work*

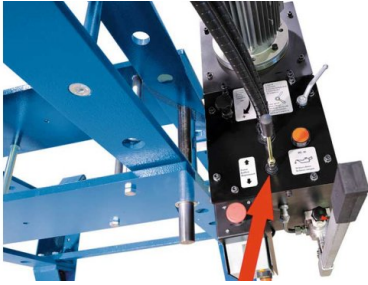

*The press is operated via joystick*



*Table height can be adjusted easily via hydraulic lifting gear*



*The hydraulic cylinder can be moved laterally and is clamped mechanically*

## PRODUCT DETAILS

- Ideal for repair and assembly work
- Truing of axles, supports, shafts and much more
- For removal and press fitting bearings and bushings
- 2-step hydraulic unit
- Supply voltage 220V, 3 ph, 60 Hz
- Work cylinder with smooth horizontal adjustment
- Press frame features high rigidity, functionality and excellent finish

## STANDARD EQUIPMENT

2-step hydraulic unit  
Traversing work cylinder  
Height-adjustable work table  
Operator manual